

IMPORTANT SAFETY AND INSTALLATION INSTRUCTIONS


WARNING: Risk of fire and electrical shock. This product is to be installed by a qualified electrician only.

CAUTION: When using electrical equipment, basic safety precautions should always be followed including the following: Read all instructions carefully before installation and save

for future use. Make sure installation and all connections are in accordance with National Electrical Code and any local regulations. To avoid possible electrical shock, be sure that the power supply is turned off before installing or servicing this fixture. Servicing should be performed by qualified service personnel.

These instructions do not claim to cover all details or variations. When additional information is desired, please contact your SPI representative.


SPHERE PENDANTS - STEM SUSPENSION

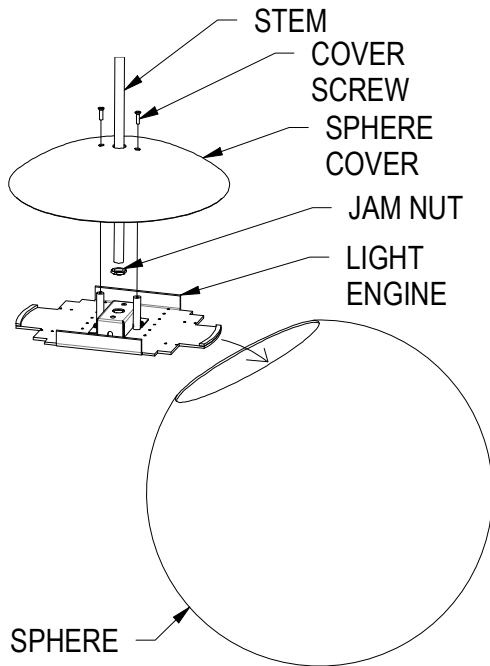

Stem Attachment to Sphere

1. Remove Sphere Cover from Light Engine by removing the two Screws. Support Light Engine to protect LEDs.
2. Slide Stem through Canopy and then Thread Jam Nut onto Stem. Feed Light Engine Lead Wires into Stem.
3. Thread Stem into Light Engine and secure with Jam Nut. Assemble Light Engine into Sphere as shown. Secure Sphere Cover with Screws.


CAS

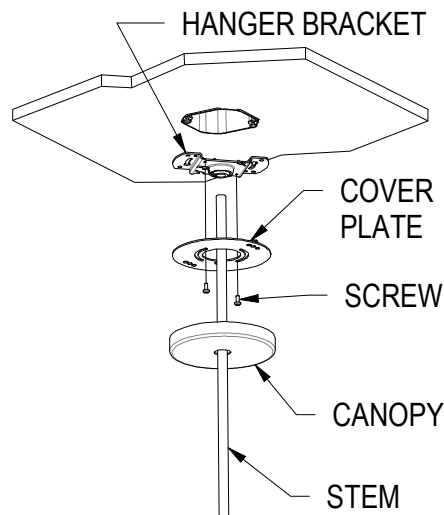

CAS Mounting Instructions (REMOTE POWER SUPPLIES)

1. Slide Canopy and Canopy Plate over Stem. Thread on Hanger Bracket (with Swivel Ball.)
2. Lift fixture and attach Hanger Bracket to J-Box with screws (by others.)
3. Complete wiring per local code. After wiring, attach Canopy Plate to Hanger Bracket with Screws.
4. Secure Canopy to Canopy Plate by aligning studs from Canopy to receptacles on Canopy Plate. Push Canopy to engage receptacles until flush with ceiling.

PSS

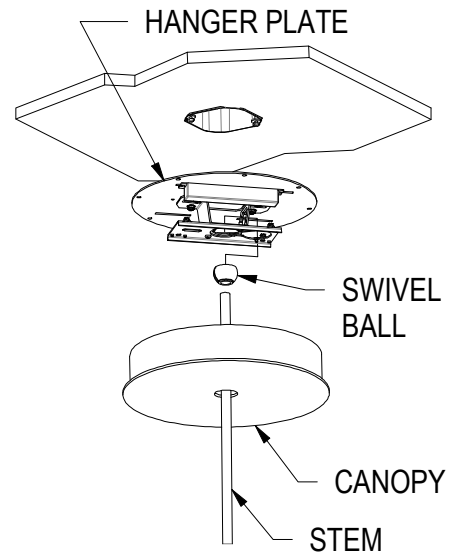

PSS Mounting Instructions (CANOPY MOUNTED POWER SUPPLIES)

1. Slide Canopy over Stem. Thread on Swivel Ball.
2. Attached Hanger Plate to J-Box with screws (by others.)
3. Lift fixture and place Swivel Ball into socket of Hanger Plate. Complete wiring per local code.
4. Secure Canopy to Hanger Plate by aligning studs from Canopy to receptacles on Hanger Plate. Push Canopy to engage receptacles until flush with ceiling.

8/16/23

IS114612X